

Clear View

Type 350 - 60 watt



12 volt with heater

Order. No. 10254

24 volt with heater

Order. No. 10255


110 volt with heater

Order. No. 10257

220 volt with heater

Order. No. 10258

scanwipers[®]

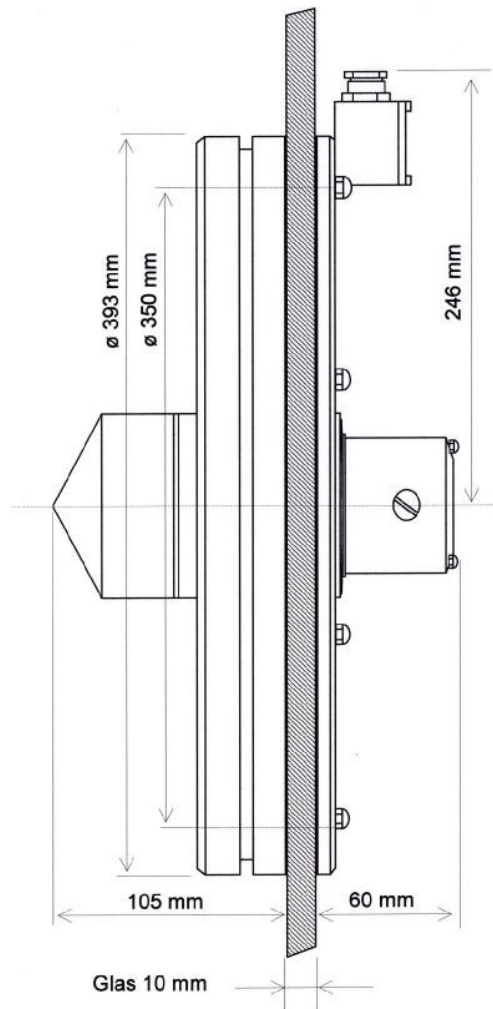

When ordering a rotating pane, remember to specify the thickness of the glass in the pane in which it is to be mounted

Accessories:



Operating box for Clear View.



Operating panel for Clear View

Specification:

Diameter of pane: 393 mm
Viewing diameter: 350 mm
Internal depth: 60 mm
May be mounted in glass of thickness: 6 – 19 mm
Weight: 6.5 kg
RPM: 1400 – 1600 rpm.
Motor power: 60 Watt.
Heating element: 130 Watt.

Clear View is a rotating pane manufactured from seawater-resistant aluminium. The pane functions via its front part rotating at a high speed, thus slinging the water away from the pane, making for a clear view even in rough weather.

The pane is equipped with a heating element - if it is ordered with a heater - which will ensure that the pane does not fog up, it also contributes to preventing the mechanism from freezing together if the temperature drops below the freezing point. For sailing in very cold areas the pane can be delivered with a tubular heating element of 150 watt.

An operating panel can be ordered as extra equipment, either as an assembled box ready to be mounted on a wall, or a front panel for insertion into a wall or panel.

The pane itself can be delivered for the following voltages: 12 volt – 24 volt – 32 volt – 110 volt AC/DC and 220 volt AC/DC, all with or without heating.

The pane is furnished with detailed installation instructions as well as a drill template and mounting tool.

Before the pane can be mounted in a window, a hole needs to be drilled in it for the motor and 10 holes for the unit itself.

It is also possible to order a new window with specified dimensions, in which the pane has already been mounted, this costs extra.

scanwipers®